



# Case Sealer

## SP-304

### Case Sealing for the Real World

This reliable case sealer for industrial environments seals a wide range of uniform cases.

Little David delivers packaging equipment that works for you



Universal folding bar folds the bottom flaps



#### The SP-304 offers:

- ☒ 3 flap folder
- ☒ Simple operation
- ☒ Proven side belt
- ☒ Bottom major flap folding bars
- ☒ Interchangeable tape cartridges
- ☒ Narrow profile "T-rail" table
- ☒ Top squeezer rollers

#### The SP-304 replaces:

- ☒ Expensive labor
- ☒ Hand taping boxes
- ☒ Unsafe machinery

Little David SP-304



**LITTLE DAVID**




[www.loveshaw.com](http://www.loveshaw.com)

# SP-304

## Dimensions:

### SP-304:

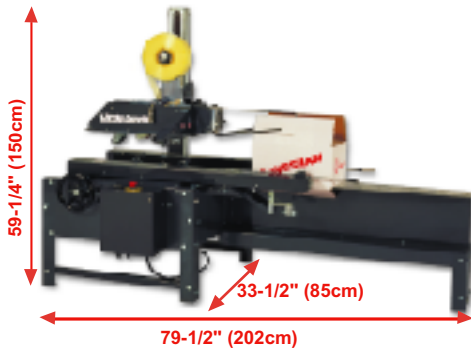

## Additional Case Sealer Models:

### Also Available LD-3SB:

- Semi-automatic case sealer
- Seals top and bottom of uniform box sizes



### Also Available LD-16A:

- Fully automatic case sealer
- Seals top and bottom of uniform box sizes



## Distributor Information:

## Features of the SP-304:

### Reliable Performance - Warranty:

- 2 Year Gear Motors
- 2 Years Gear Reducer
- 3 Years Cartridge\*

\*Moving and wear parts are not included. Other restrictions may apply. Consult Loveshaw or your authorized Little David® Distributor for details

### Flexible:

- Tapes boxes from 4-1/2" (114mm) to 24" (610mm) in height

### Easy Operation:

- Plug in operation
- Minimal operator training required
- Sealed drive system
- CaseLocker ST™ tape cartridge requires no lubrication
- Alleviates twisting motion known to cause carpal tunnel syndrome
- Self-centering belts

### Safe:

- Patented single mast design allows clear access
- Knife guard system of the CaseLocker ST™ tape cartridge only allows the blade to be exposed only when the rollers have been depressed

## Specifications of the SP-304:

### Power Requirements:

- 110 VAC, single phase, 60 cycle, 8.0 Amps

### Operating Speed:

- Continuous belt drive; 72' per minute (18.3 m/min.)  
(production rate depends on box size & operator dexterity)

### Weight:

- 300 lbs. (136 kg) uncrated

### Case Capacity: (with 2" wide CaseLocker ST™ Cartridge)

- | Minimum:               | Maximum:            |
|------------------------|---------------------|
| Height: 4-1/2" (114mm) | Height: 24" (610mm) |
| Width: 4-1/2" (114mm)  | Width: 20" (508mm)  |
| Length: 6" (152mm)     | Length: 24" (610mm) |

\*Certain Length x Width x Height combinations may not process due to unstable conveying conditions

## Options of the SP-304:

- Casters
- Leg adjustments
- Removable "T" rail pack table
- Rear standard or roller pack table
- Top hold down sled (for semi-automatic case former model)
- High mast for box heights to 34"
- Stainless steel
- NEMA 4, NEMA 7

**LOVESHAW**

Route 296, Box 83  
South Canaan, PA 18459  
Tel: (570) 937-4921 Fax: (570) 937-3229  
(800) 572-3434

**LOVESHAW Europe**

Unit 9 Brunel Gate,  
West Portway Industrial Estate  
Andover, Hampshire England SP 10 3 SL  
Tel: (1264) 357511 Fax: (1264) 355964



©Lovesshaw, 2004