

Auto PAC 300 Side Seal


The Auto PAC 300 Side Seal may be used as a stand alone unit with an optional roller table, or in-line with a split conveyor system. It is extremely effective when the strapping application needs to be close to the floor. In addition, the side mounted strapping head keeps dirt, dust and moisture from the product away from the strapping head. The Auto PAC 300 Side Seal is activated manually or by foot switch. The Auto PAC 300 Side Seal is also available in a fully automatic version. The fully automatic version is equipped with a power conveying system and is activated by a photocell, or it can be interfaced with an existing conveyor system. Standard features on the Auto PAC 300 Side Seal include:

- **Lubrication Free Strapping Head**
The strapping head never needs lubrication.
- **Auto Feeding**
Loading strap is automatic, activated by pressing the reset switch.
- **Jam Free Automatic Re-Feeding**
In the event of any feeding problems, the strap is automatically re-fed into the strapping head, and the machine returns to the ready position.
- **Loop Ejection**
Missed straps are automatically ejected from the machine, and the Auto PAC 300 Side Seal re-sets itself.
- **End of Strap Sensor**
If the coil does not have enough strap to complete the cycle, the Auto PAC 300 Side Seal ejects the short piece, and the machine is immediately ready for a new coil.
- **Electronic Tension**
Tension is controlled electronically, yielding consistent tension.
- **Improved Speed**
Up to 30 cycles per minute.
- **CE Certified**

TECHNICAL SPECIFICATIONS

Dimensions: 56.3"W x 25.2"D x 68.1"H
 Strapping Head Height: 25.5"
 Package Size: Minimum- 5'H x 1 1/4"W
 Maximum- Depends on arch size
 (See chart for available sizes)

Weight: 550 lbs.
 Tension Range: 15 – 150 lbs.
 Speed: 30 cycles per minute
 Strap Size: 3/8" (9mm) – 1/2" (12mm)
 Core Size: 8x8, 9x8
 Power Requirements: 220V, 3-phase 50/60 Hz

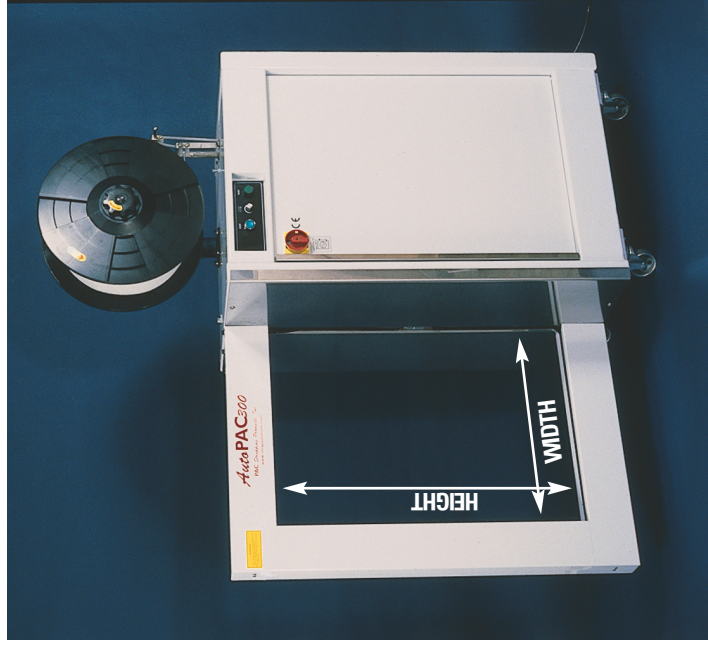

Height	25.6" 650mm	33.4" 850mm	41.3" 1050mm	49.2" 1250mm	57.0" 1450mm	64.9" 1650mm	72.8" 1850mm
Width	15.7" 400mm						
			Standard				

AVAILABLE ARCH SIZES (INCHES/MM)

AUTO PAC 300 SIDE SEAL STANDARD UNITS

AVAILABLE IN 1/2" AND 3/8" STRAP

AVAILABLE FOR 1/2" HEAVY DUTY STRAP (500 LBS. OR GREATER)

NOT AVAILABLE

Auto PAC 300 Side Seal


The Auto PAC 300 Side Seal may be used as a stand alone unit with an optional roller table, or in-line with a split conveyor system. It is extremely effective when the strapping application needs to be close to the floor. In addition, the side mounted strapping head keeps dirt, dust and moisture from the product away from the strapping head. The Auto PAC 300 Side Seal is activated manually or by foot switch. The Auto PAC 300 Side Seal is also available in a fully automatic version. The fully automatic version is equipped with a power conveying system and is activated by a photocell, or it can be interfaced with an existing conveyor system. Standard features on the Auto PAC 300 Side Seal include:

- **Lubrication Free Strapping Head**
The strapping head never needs lubrication.
- **Auto Feeding**
Loading strap is automatic, activated by pressing the reset switch.
- **Jam Free Automatic Re-Feeding**
In the event of any feeding problems, the strap is automatically re-fed into the strapping head, and the machine returns to the ready position.
- **Loop Ejection**
Missed straps are automatically ejected from the machine, and the Auto PAC 300 Side Seal re-sets itself.
- **End of Strap Sensor**
If the coil does not have enough strap to complete the cycle, the Auto PAC 300 Side Seal ejects the short piece, and the machine is immediately ready for a new coil.
- **Electronic Tension**
Tension is controlled electronically, yielding consistent tension.
- **Improved Speed**
Up to 30 cycles per minute.
- **CE Certified**

TECHNICAL SPECIFICATIONS

Dimensions: 56.3"W x 25.2"D x 68.1"H
 Strapping Head Height: 25.5"
 Package Size: Minimum- 5'H x 1 1/4"W
 Maximum- Depends on arch size
 (See chart for available sizes)

Weight: 550 lbs.
 Tension Range: 15 – 150 lbs.
 Speed: 30 cycles per minute
 Strap Size: 3/8" (9mm) – 1/2" (12mm)
 Core Size: 8x8, 9x8
 Power Requirements: 220V, 3-phase 50/60 Hz

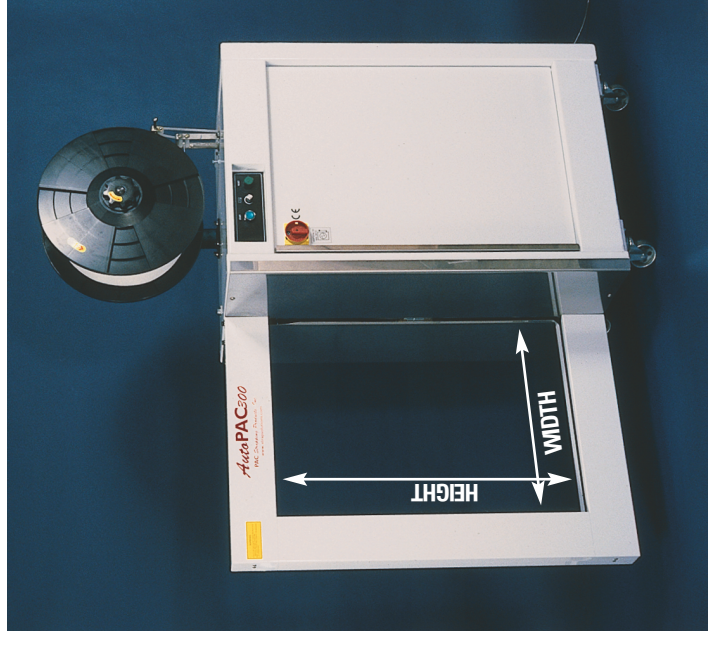

Height	25.6" 650mm	33.4" 850mm	41.3" 1050mm	49.2" 1250mm	57.0" 1450mm	64.9" 1650mm	72.8" 1850mm
Width	15.7" 400mm						
			Standard				

AVAILABLE ARCH SIZES (INCHES/MM)

AUTO PAC 300 SIDE SEAL STANDARD UNITS

AVAILABLE IN 1/2" AND 3/8" STRAP

AVAILABLE FOR 1/2" HEAVY DUTY STRAP (500 LBS. OR GREATER)

NOT AVAILABLE

