

DV25

Copper Shielding Tape

PRODUCT DESCRIPTION

Copper laminate combined with polyester tape with one edge of the roll folded. The tape is designed for EMI/RFI shielding.

PHYSICAL PROPERTIES

Copper foil — 1.4 mil copper foil.

Polyester film — 0.00092” polyester film.


Breaking strength — 54 lbs./inch of width.

Elongation at break — 29%.

Color — Copper with tint on film side.

Storage — 70 degrees F (21 degrees C) at 50% RH.

TECHNICAL DATA

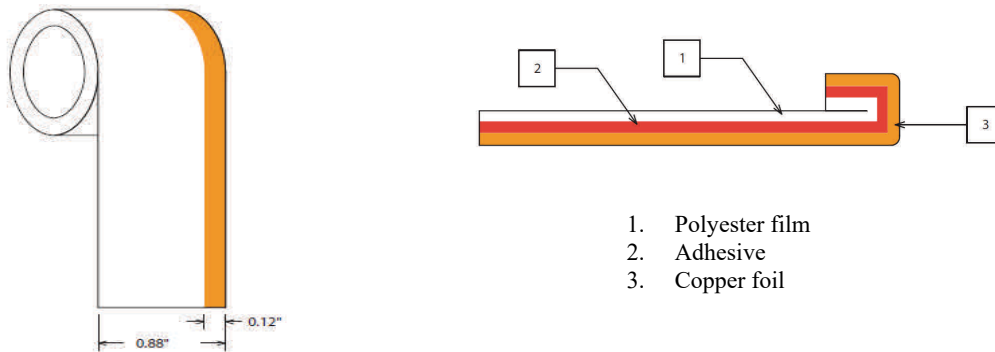

*Note: The above are typical values and should **not** be used in writing specifications. The determination of the suitability of this product for any specific use is solely the responsibility of the user. No representatives, guarantees or warranties of any kind are made to the accuracy or suitability for specific applications.*

Delaware Valley Packaging Group
1425 Wells Drive • Bensalem, PA 19020
Steve Conway (267) 229-2379